



### Application

Extraction check valves are valves used to prevent the back flow of the service fluid in extraction lines of steam turbines. Each extraction check valve is designed exactly for the specified extraction parameters.

### Working medium

- stem
- gases

Taking account of the actuator equipment, the operating fluid temperature must not exceed 80 °C.

### Maximum service temperature

- +450°C to DN 800, NPS 32"
- +350°C to DN 800, NPS 32"

### Technical description

The extraction check valve is designed as a swing check valve with double eccentricity. The disc with conical sealing surface is swinging on a shaft which is carried in plain bearings. In the „CLOSED“ position, the sealing surface of the disc is in contact with the valve body seat. The way of swinging is pressure equalized, there are no axial forces acting on the shaft. The shaft bears also a counterweight to balance the mass of the disc. The balancing guarantees minimum pressure losses not exceeding 1%. This counterweight is situated outside the valve, off the valve body bore, in a separated pressure-closed box. The extraction check valve is equipped with an actuator which guarantees the quick-acting function of the valve and a lever to test the valve function as a standard. Both the actuator and the lever are carried on a separate shaft so that their passive resistances do not affect the valve function. The welded design of the extraction check valves meets the requirements of EN ISO 15614-1, PED 97/23/EC or, if required by the customer, ASME CODE, Section IX.

### Operation

Self-acting, the safe closing of the disc is realized by the ancillary actuator (pneumatic, hydraulic actuator). Actuator type as specified by the customer.

### Possible valve equipment

- hand lever
- worm gear operator
- electric position sensor



### Testing

The valves are tested in accordance with:

- EN 12266-1 / ISO 5208
- API 598
- ASME B16.34

### Connection to the piping

- **flanged ends** according to EN 1092-1, ASME B16.5, ASME B16.47, face-to-face dimensions according to EN 558, series 14,15
- **welding ends** according to EN 12627, ASME B16.25, end-to-end dimensions according to EN 12982

### Installation


The extraction check valves C09.6 may be supplied with designs for either horizontal or vertical piping. The valve shall be positioned between the connecting ends of the piping in the direction in which the flow of the fluid from the turbine opens the disc. The main shaft of the valve (axis of disc rotation) has to be in horizontal position. The connection, adjustment and testing of the actuators shall be performed by a trained supplier in accordance with instructions given by the manufacturer.

### Advantages


- possibility of installation into both vertical and horizontal pipings
- unique design for the specified extraction parameters
- guaranteed tightness
- low pressure loss
- low passive resistances
- no axial forces
- no castings are used
- maintenance-free valves with long service life
- design variability




With top-mounted actuator and hand lever

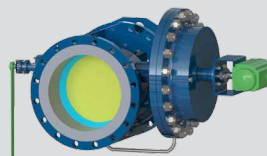

With side-mounted actuator and hand lever

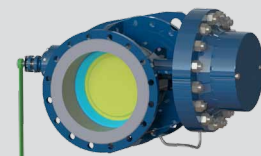


Without actuator, with hand lever

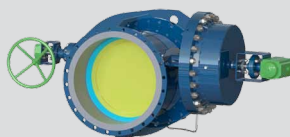

With side-mounted actuator and gear operator



With side-mounted actuator and position sensor

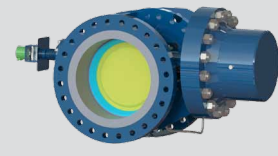


Without actuator, with position sensor



DN 80-1800 • PN 6-100  
 NPS 3"-70" • Class 150-600  
 Tmax +450 °C to DN 800 (NPS 32")  
 Tmax +350 °C above DN 800 (NPS 32")

Connection: ☉ EN 1092-1, ASME B16.5, B16.47 FLANGED ENDS  
 ☉ EN 12627, ASME B16.25 WELDED ENDS

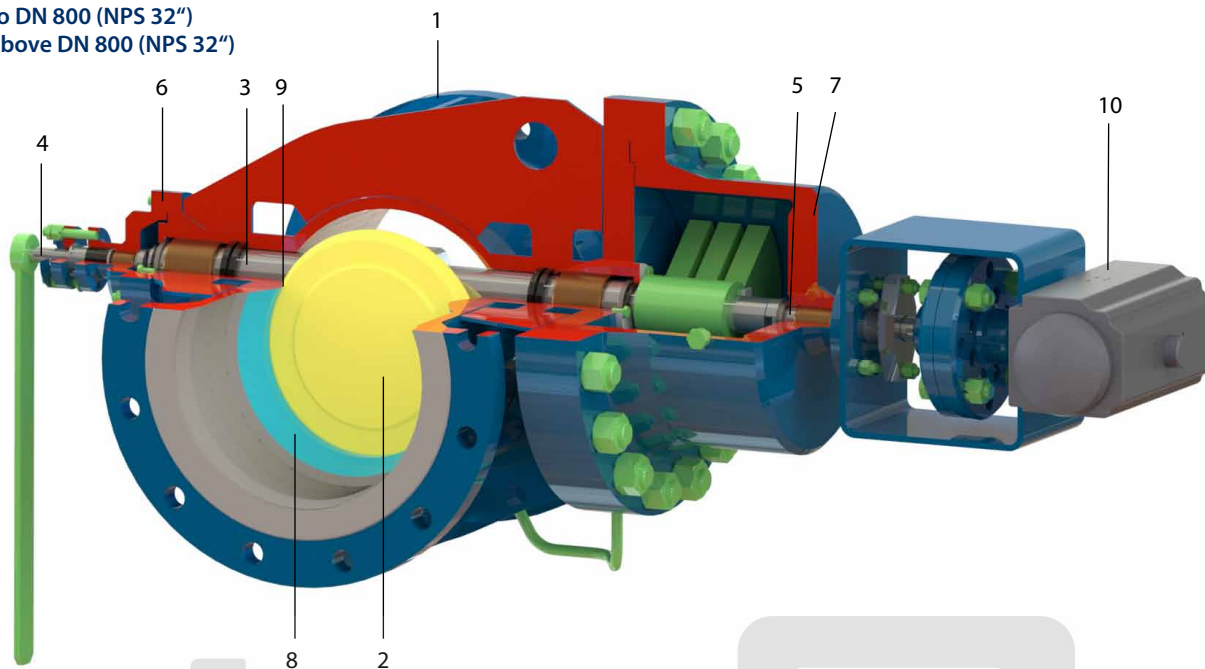

### Material

Pozice	Component	EN		ASTM	
		DN 80 - DN 800 to 450 °C	DN 900 - DN 1800 to 350 °C	DN 80 - DN 800 to 450 °C	DN 900 - DN 1800 to 350 °C
1	Body	1.0425 (P265 GH) 1.7335 (13CrMo4-5)	1.0425 (P265 GH)	A387 Gr.22 A105 A516 Gr.60 A182 F12 A387 Gr.12	A516 Gr.60
2	Disc				
6	Cover				
7	Counterweight cover				
8	Seat	1.4021 (17 022), 1.4923 (17 134)	1.4021 (17 022)	A276 420T, 1.4923	A276 420T
3, 4, 5	Shaft				
9	Seat hard facing				
10	Actuator	Quarter-turn actuator, hydraulic actuator, linear actuator			

### Production range


DN	NPS	PN								Class			
		6	10	16	25	40	63	100	150	300	400	600	
80	3"	.	.	.	.	.	.	.	.	.	.	.	.
100	4"	.	.	.	.	.	.	.	.	.	.	.	.
125	5"	.	.	.	.	.	.	.	.	.	.	.	.
150	6"	.	.	.	.	.	.	.	.	.	.	.	.
200	8"	.	.	.	.	.	.	.	.	.	.	.	.
250	10"	.	.	.	.	.	.	.	.	.	.	.	.
300	12"	.	.	.	.	.	.	.	.	.	.	.	.
350	14"	.	.	.	.	.	.	.	.	.	.	.	.
400	16"	.	.	.	.	.	.	.	.	.	.	.	.
450	18"	.	.	.	.	.	.	.	.	.	.	.	.
500	20"	.	.	.	.	.	.	.	.	.	.	.	.
600	24"	.	.	.	.	.	.	.	.	.	.	.	.
700	28"	.	.	.	.	.	.	.	.	.	.	.	.
800	32"	.	.	.	.	.	.	.	.	.	.	.	.
900	36"	.	.	.	.	.	.	.	.	.	.	.	.
1000	40"	.	.	.	.	.	.	.	.	.	.	.	.
1200	48"	.	.	.	.	.	.	.	.	.	.	.	.
1400	56"	.	.	.	.	.	.	.	.	.	.	.	.
1500	60"	.	.	.	.	.	.	.	.	.	.	.	.
1600	64"	.	.	.	.	.	.	.	.	.	.	.	.
1800	70"	.	.	.	.	.	.	.	.	.	.	.	.

\*Valves with welding ends only



DN 80-1800 • PN 6-100 • Tmax +450 °C to DN 800  
 Tmax +350 °C above DN 800

Connection: EN 1092-1 FLANGED ENDS  
 EN 12 627 WELDED ENDS

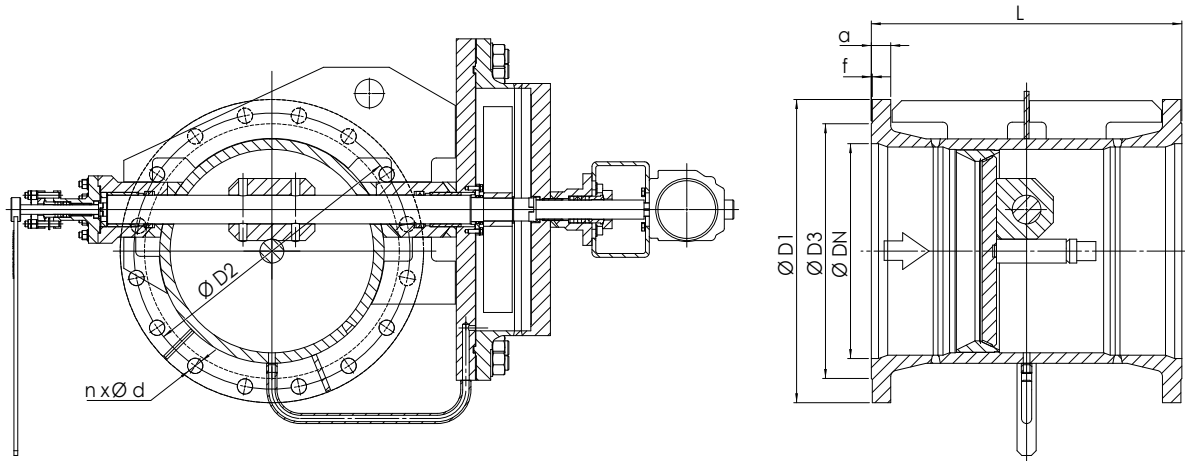

### PN 6

DN	D1	D2	D3	a	f	d	n	L
80	190	150	128	16	3	18	4	280
100	210	170	148	16	3	18	4	305
125	240	200	178	18	3	18	8	325
150	265	225	202	18	3	18	8	350
200	320	280	258	20	3	18	8	400
250	375	335	312	22	3	18	12	450
300	440	395	365	22	4	22	12	500
350	490	445	415	22	4	22	12	550
400	540	495	465	22	4	22	16	600
450	595	550	520	22	4	22	16	650
500	645	600	570	24	4	22	20	700
600	755	705	670	30	5	26	20	800
700	860	810	775	30	5	26	24	900
800	975	920	880	30	5	30	24	1000
900	1075	1020	980	34	5	30	24	1100
1000	1175	1120	1080	38	5	30	28	1200
1200	1405	1340	1295	42	5	33	32	630
1400	1630	1560	1510	56	5	36	36	710
1600	1830	1760	1710	63	5	36	40	790
1800	2045	1970	1920	69	5	39	44	870

### PN 10

DN	D1	D2	D3	a	f	d	n	L
80	200	160	138	20	3	18	8	280
100	220	180	158	20	3	18	8	305
125	250	210	188	22	3	18	8	325
150	285	240	212	22	3	18	8	350
200	340	295	268	24	3	22	8	400
250	395	350	320	26	3	22	12	450
300	445	400	370	26	4	22	12	500
350	505	460	430	26	4	22	16	550
400	565	515	482	26	4	26	16	600
450	615	565	532	28	4	26	20	650
500	670	620	585	28	4	26	20	700
600	780	725	685	30	5	30	20	800
700	895	840	800	35	5	30	24	900
800	1015	950	905	38	5	33	24	1000
900	1115	1050	1005	38	5	33	28	1100
1000	1230	1160	1110	44	5	36	28	1200
1200	1455	1380	1330	55	5	39	32	630
1400	1675	1590	1535	65	5	42	36	710
1600	1915	1820	1760	75	5	48	40	790
1800	2115	2020	1960	85	5	48	44	870



DN 80-1800 • PN 6-100 • Tmax +450 °C to DN 800  
Tmax +350 °C above DN 800

Connection:  EN 1092-1 FLANGED ENDS  
 EN 12 627 WELDED ENDS

## PN 16

DN	D1	D2	D3	a	f	d	n	L
80	200	160	138	20	3	18	8	280
100	220	180	158	20	3	18	8	305
125	250	210	188	22	3	18	8	325
150	285	240	212	22	3	22	8	350
200	340	295	268	24	3	22	12	400
250	405	355	320	26	3	26	12	450
300	460	410	378	28	4	26	12	500
350	520	470	438	30	4	26	16	550
400	580	525	490	32	4	30	16	600
450	640	585	550	40	4	30	20	650
500	715	650	610	44	4	33	20	700
600	840	770	725	54	5	36	20	800
700	910	840	795	40	5	36	24	900
800	1025	950	900	41	5	39	24	1000
900	1125	1050	1000	48	5	39	28	1100
1000	1255	1170	1115	59	5	42	28	1200
1200	1485	1390	1330	78	5	48	32	630
1400	1685	1590	1530	84	5	48	36	710
1600	1930	1820	1750	102	5	56	40	790
1800	2130	2020	1950	110	5	56	44	870

## PN 25

DN	D1	D2	D3	a	f	d	n	L
80	200	160	138	24	3	18	8	280
100	235	190	162	24	3	22	8	305
125	270	220	188	26	3	26	8	325
150	300	250	218	28	3	26	8	350
200	360	310	278	30	3	26	12	400
250	425	370	335	32	3	30	12	450
300	485	430	395	34	4	30	16	500
350	555	490	450	38	4	33	16	550
400	620	550	505	40	4	36	16	600
450	670	600	555	46	4	36	20	650
500	730	660	615	48	4	36	20	700
600	845	770	720	58	5	39	20	800
700	960	875	820	50	5	42	24	900
800	1085	990	930	53	5	48	24	1000
900	1185	1090	1030	57	5	48	28	1100
1000	1320	1210	1140	63	5	56	28	1200
1200	1530	1420	1350	70	5	56	32	630
1400	1755	1640	1560	*	5	62	36	710
1600	1975	1860	*	*	5	62	40	790
1800	2195	2070	*	*	5	70	44	870

\* according to customer's request

Face to face dimensions for valves with welding ends are identical to those of valves with flanged ends (valves with different face-to-face and end-to-end dimensions can be delivered by agreement with the manufacturer, if required by the customer).



DN 80-1800 • PN 6-100 • Tmax +450 °C to DN 800  
Tmax +350 °C above DN 800

Connection: ☉ EN 1092-1 FLANGED ENDS  
☼ EN 12 627 WELDED ENDS

## PN 40

DN	D1	D2	D3	a	f	d	n	L
80	200	160	138	24	3	18	8	280
100	235	190	162	24	3	22	8	305
125	270	220	188	26	3	26	8	325
150	300	250	218	28	3	26	8	350
200	375	320	285	34	3	30	12	400
250	450	385	345	38	3	33	12	450
300	515	450	410	42	4	33	16	500
350	580	510	465	46	4	36	16	550
400	660	585	535	50	4	39	16	600
450	685	610	560	57	4	39	20	650
500	755	670	615	57	4	42	20	700
600	890	795	735	72	5	48	20	800
700	995	900	840	85	5	48	24	900
800	1140	1030	960	98	5	56	24	1000
900	1250	1140	1070	105	5	56	28	1100
1000	1360	1250	1180	114	5	56	28	1200
1200	1575	1460	1380	133	5	62	32	630

## PN 63

DN	D1	D2	D3	a	f	d	n	L
80	215	170	138	28	3	22	8	280
100	250	200	162	30	3	26	8	305
125	295	240	188	34	3	30	8	325
150	345	280	218	36	3	33	8	350
200	415	345	285	42	3	36	12	400
250	470	400	345	46	3	36	12	450
300	530	460	410	52	4	36	16	500
350	600	525	465	56	4	39	16	550
400	670	585	535	60	4	42	16	600
500	800	705	615	68	4	48	20	700
600	930	820	735	76	5	56	20	800
700	1045	935	840	84	5	56	24	900
800	1165	1050	960	96	5	62	24	1000
900	1285	1170	1070	*	5	62	28	1100
1000	1415	1290	*	*	*	70	28	1200

\* according to customer's request


## PN 100

DN	D1	D2	D3	a	f	d	n	L
80	230	180	138	32	3	26	8	280
100	265	210	162	36	3	30	8	305
125	315	250	188	40	3	33	8	356
150	355	290	218	44	3	33	12	394
200	430	360	285	52	3	36	12	457
250	505	430	345	60	3	39	12	533
300	585	500	410	68	4	42	16	610
350	655	560	465	74	4	48	16	686
400	715	620	535	78	4	48	16	762
500	870	760	615	94	4	56	20	914
600	940	838	692	102	5	51	24	1067
700	1073	965	800	112	5	54	28	1100
800	1194	1080	915	118	5	61	28	1200
900	1315	1194	1023	124	5	67	28	1300
1000	1321	1212,9	*	*	*	61	32	1400

Face to face dimensions for valves with welding ends are identical to those of valves with flanged ends (valves with different face-to-face and end-to-end dimensions can be delivered by agreement with the manufacturer, if required by the customer).



NPS 3"-70" • Class 150-600 • Tmax +450 °C to NPS 32"  
Tmax +350 °C above NPS 32"

Connection:  ASME B16.5, B16.47 FLANGED ENDS  
 ASME B16.25 WELDED ENDS

## Class 150

NPS	DN	D1	D2	D3	a	f	d	n	L
3"	80	190	152,4	127	24,3	2	19	4	280
4"	100	230	190,5	157,2	24,3	2	19	8	305
5"	125	255	215,9	185,7	24,3	2	22	8	325
6"	150	280	241,3	215,9	25,9	2	22	8	350
8"	200	345	298,5	269,9	29	2	22	8	400
10"	250	405	362	323,8	30,6	2	25	12	450
12"	300	485	431,8	381	32,2	2	25	12	500
14"	350	535	476,3	412,8	35,4	2	29	12	550
16"	400	595	539,8	469,9	37	2	29	16	600
18"	450	635	577,9	533,4	40,1	2	32	16	650
20"	500	700	635	584,2	43,3	2	32	20	700
24"	600	815	749,3	692,2	48,1	2	35	20	800
28"	700	925	863,6	800	71,9	2	35	28	900
30"	750	985	914,4	857	75,1	2	35,1	28	950
32"	800	1060	977,9	914	81,4	2	41,1	28	1000
34"	850	1110	1028,7	965	83	2	41,1	32	1050
36"	900	1170	1085,8	1022	90,9	2	41,1	32	1100
38"	950	1240	1149,4	1073	87,8	2	41,1	32	1150
40"	1000	1290	1200,2	1124,0	90,9	2	41,1	36	1200
42"	1050	1345	1257,3	1194	97,3	2	41,1	36	570
44"	1100	1405	1314,4	1245	102,1	2	41,1	40	590
46"	1150	1455	1365,2	1295	103,6	2	41,1	40	610
48"	1200	1510	1422,4	1359	108,4	2	41,1	44	630
50"	1250	1570	1479,6	1410	111,6	2	47,8	44	650
52"	1300	1625	1536,7	1461	116,3	2	47,8	44	670
54"	1350	1685	1593,8	1511	121,1	2	47,8	44	690
56"	1400	1745	1651,0	1575	124,3	2	47,8	48	710
58"	1450	1805	1708,2	1626	129	2	47,8	48	730
60"	1500	1855	1759,0	1676	132,2	2	47,8	52	750
62"	1550	1910	1810	1730	134	2	47,8	56	770
64"	1600	1965	1860	1780	138	2	47,8	56	790
70" *	1800	1840	-	1770	-	-	-	-	870

\* only for welded ends

## Class 300

NPS	DN	D1	D2	D3	a	f	d	n	L
3"	80	210	168,3	127	29	2	22	8	280
4"	100	255	200	157,2	32,2	2	22	8	305
5"	125	280	235	185,7	35,4	2	22	8	325
6"	150	320	269,9	215,9	37	2	22	12	350
8"	200	380	330,2	269,9	41,7	2	25	12	400
10"	250	445	387,4	323,8	48,1	2	29	16	450
12"	300	520	450,8	381	51,3	2	32	16	500
14"	350	585	514,4	412,8	54,4	2	32	20	550
16"	400	650	571,5	469,9	57,6	2	35	20	600
18"	450	710	628,6	533,4	60,8	2	35	24	650
20"	500	775	685,8	584,2	64	2	35	24	700
24"	600	915	812,8	692,2	70,3	2	41	24	800
28"	700	1035	939,8	800	86,2	2	45	28	900
32"	800	1150	1054,1	914	98,9	2	51	28	1000
36"	900	1270	1168,4	1022	105,2	2	54	32	1100
40"	1000	1240	1155,7	1086	114,8	2	45	32	1200
48"	1200	1465	1371,6	1302	133,8	2	51	32	630

Face to face dimensions for valves with welding ends are identical to those of valves with flanged ends (valves with different face-to-face and end-to-end dimensions can be delivered by agreement with the manufacturer, if required by the customer).



NPS 3"-70" • Class 150-600 • Tmax +450 °C to NPS 32"  
 Tmax +350 °C above NPS 32"

Connection: ASME B16.5, B16.47 FLANGED ENDS  
 ASME B16.25 WELDED ENDS

### Class 400

NPS	DN	D1	D2	D3	a	f	d	n	L
3"	80	210	168,3	127	38,8	7	22	8	280
4"	100	255	200	157,2	42	7	22	8	305
5"	125	280	235	185,7	45,1	7	22	8	325
6"	150	320	269,9	215,9	48,3	7	22	12	350
8"	200	380	330	269,9	54,7	7	26	12	400
10"	250	445	387,4	323,8	61	7	29	16	450
12"	300	520	450,8	381	64,2	7	32	16	500
14"	350	585	514,4	412,8	67,4	7	32	20	550
16"	400	650	571,5	469,9	70,5	7	35	20	600
18"	450	710	628,6	533,4	71,7	7	35	24	650
20"	500	775	685,8	584,2	76,9	7	39	24	700
24"	600	915	812,8	692,2	79,2	7	45	24	800
28"	700	1035	939,8	800	102,3	7	51	28	900
32"	800	1150	1054,1	914	115	7	54	28	1000
36"	900	1270	1168,4	1022	121,3	7	54	32	1100
40"	1000	1270	1174,8	1092,2	137	7	51	32	1200

### Class 600

NPS	DN	D1	D2	D3	a	f	d	n	L
3"	80	210	168,3	127	38,8	7	22	8	280
4"	100	275	215,9	157,2	45,1	7	25	8	305
5"	125	330	266,7	185,7	51,5	7	29	8	356
6"	150	355	292,1	215,9	54,7	7	29	12	394
8"	200	420	349,2	269,9	62,6	7	32	12	400
10"	250	510	431,8	323,8	70,5	7	35	16	450
12"	300	560	489	381	73,7	7	35	20	610
14"	350	605	527	412,8	76,9	7	38	20	686
16"	400	685	603,2	469,9	79,2	7	41	20	762
18"	450	745	654	533,4	89,6	7	45	20	864
20"	500	815	723,9	584,2	95,9	7	45	24	914
24"	600	940	838,2	692,2	108,6	7	51	24	1067
28"	700	1075	965,2	800	118,2	7	54	28	1100
32"	800	1195	1079,5	914	124,5	7	61	28	1200
36"	900	1315	1193,8	1022	130,9	7	67	28	1300
40"	1000	1321	1212,9	1111,3	165,8	7	61	32	1400

Face to face dimensions for valves with welding ends are identical to those of valves with flanged ends (valves with different face-to-face and end-to-end dimensions can be delivered by agreement with the manufacturer, if required by the customer).



Extraction check valves C09.6 DN 1800