


## PTFE-lined pipes

- ASME/ANSI B16.5 Class 150

- DN 1/2" - DN 24"

- Standard version: 1 fixed flanges, 1 lap joint flange

- Carbon steel body

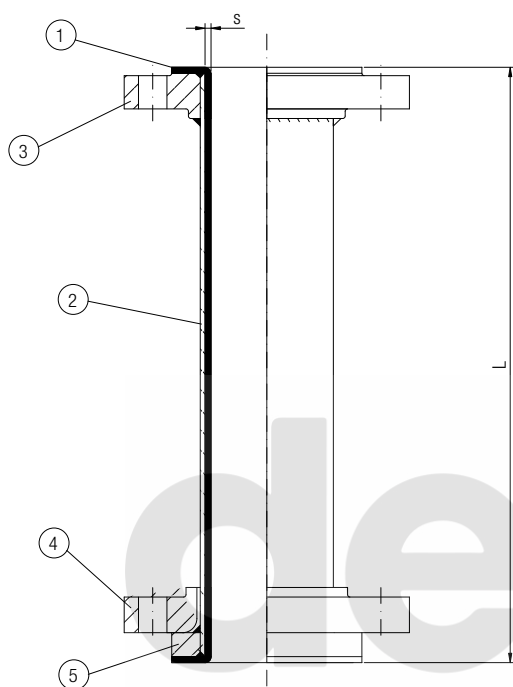

### Materials

- |   |                          |
|---|--------------------------|
| 1 | PTFE ASTM D-4894 or 4895 |
| 2 | St 37.0 - DIN 1629       |
| 3 | ASTM A 105, slip on      |
| 4 | ASTM A 105, lap joint    |
| 5 | St 37.2 - DIN 17100      |

### available on request

- Flange connection: 2 fixed flanges or 2 loose flanges
- B16.5 class 300 flanges
- Vacuum resistance
- Antistatic PTFE
- Stainless steel body
- Higher diameters on request
- Length up to 6 m

DN	L min. mm	L max. mm	s	g/m Pipe weight	Weight 2 flanges
1/2"	100	3000	2,5	1,2	1,5
3/4"	100	3000	3	1,6	2
1"	100	3000	3	2,5	2,5
1 1/4"	100	3000	3	3,4	3,6
1 1/2"	100	3000	3	4,5	4,2
2"	100	3000	3	5,8	5,5
2 1/2"	120	3000	4	7,1	6,6
3"	120	3000	4	10	8,3
4"	120	3000	4,5	14	9,9
5"	120	3000	4,5	17,5	13,2
6"	150	3000	5	23,5	16
8"	150	3000	6,25	39	23
10"	150	3000	6,75	55,5	31
12"	200	3000	8	74	39
14"	200	3000	9	85	52
16"	200	3000	10	102	67
18"	200	3000	7,5	130	85
20"	250	-	-	155	90
24"	250	-	-	204	116