
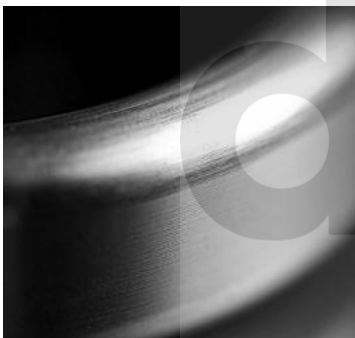


## Металически пръстени / Ring type joints

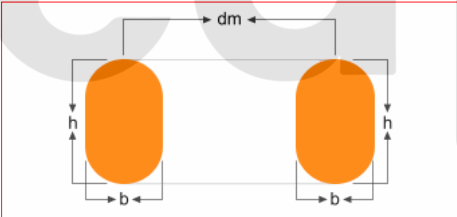

Type R oval	Type R octagonal	Type BX	Type RX
			
Тип R - Овал		R 11	R 105
ASME B 16.20 / API 6A			
EN 12560-5			
:		ASME B 16.5	16.47 A
:		Class 150 - 10.000	

NPS (inches)	Class (lbs)	Ring-Nr.	dm (mm)	b (mm)	h (mm)
1/2	300 to 600	R 11	34,13	6,35	11,11
1/2	900, 1.500	R 12	39,68	7,93	14,28
1/2	2500	R 13	42,86	7,93	14,28
3/4	300 to 600	R 13	42,86	7,93	14,28
3/4	900, 1.500	R 14	44,45	7,93	14,28
1	150	R 15	47,62	7,93	14,28
3/4	2500	R 16	50,80	7,93	14,28
1	300 to 1.500	R 16	50,80	7,93	14,28
1 1/4	150	R 17	57,15	7,93	14,28
1	2500	R 18	60,32	7,93	14,28
1 1/4	300 to 1.500	R 18	60,32	7,93	14,28
1 1/2	150	R 19	65,06	7,93	14,28
1 1/2	300 to 1.500	R 20	68,26	7,93	14,28
1 1/4	2500	R 21	72,23	11,11	17,46
2	150	R 22	82,55	7,93	14,28
1 1/2	2500	R 23	82,55	11,11	17,46
2	300 to 600	R 23	82,55	11,11	17,46
2	900, 1.500	R 24	95,25	11,11	17,46
2 1/2	150	R 25	101,60	7,93	14,28
2	2500	R 26	101,60	11,11	17,46
2 1/2	300 to 600	R 26	101,60	11,11	17,46
2 1/2	900, 1.500	R 27	107,95	11,11	17,46
2 1/2	2500	R 28	111,12	12,70	19,05
3	150	R 29	114,30	7,93	14,28
3	300 to 600	R 30	117,47	11,11	17,46
3	300 to 900	R 31	123,82	11,11	17,46
3	2500	R 32	127,00	12,70	19,05
3 1/2	150	R 33	131,76	7,93	14,28
3 1/2	300 to 600	R 34	131,76	11,11	17,46
3	1500	R 35	136,52	11,11	17,46
4	150	R 36	149,22	7,93	14,28
4	300 to 900	R 37	149,22	11,11	17,46

# ДЕАТРЕЙД.Б.Е.ОД



4	2500	R 38	157,16	15,87	22,22
4	1500	R 39	161,92	11,11	17,46
5	150	R 40	171,45	7,93	14,28
5	300 to 900	R 41	180,97	11,11	17,46
5	2500	R 42	199,50	19,05	25,40
6	150	R 43	193,67	7,93	14,28
5	1500	R 44	193,67	11,11	17,46
6	300 to 900	R 45	211,13	11,11	17,46
6	1.500	R 46	211,13	12,70	19,05
6	2.500	R 47	228,60	19,05	25,40
8	150	R 48	247,65	7,93	14,28
8	300 to 900	R 49	269,87	11,11	17,46
8	1.500	R 50	269,87	15,87	22,22
8	2.500	R 51	279,40	22,22	28,57
10	150	R 52	304,80	7,93	14,28
10	300 to 900	R 53	323,85	11,11	17,46
10	1.500	R 54	323,85	15,87	22,22
10	2.500	R 55	342,90	28,57	36,51
12	150	R 56	381,00	7,93	14,28
12	300 to 900	R 57	381,00	11,11	17,46
12	1.500	R 58	381,00	22,22	28,57
14	150	R 59	396,87	7,93	14,28
12	2.500	R 60	406,40	31,75	39,68
14	300 to 600	R 61	419,10	11,11	17,46
14	900	R 62	419,10	15,87	22,22
14	1.500	R 63	419,10	25,40	33,33
16	150	R 64	454,02	7,93	14,28
16	300 to 600	R 65	469,90	11,11	17,46
16	900	R 66	469,90	15,87	22,22
16	1.500	R 67	469,90	28,57	36,51
18	150	R 68	517,52	7,93	14,28
18	300 to 600	R 69	533,40	11,11	17,46
18	900	R 70	533,40	19,05	25,40
18	1.500	R 71	533,40	28,57	36,51
20	150	R 72	558,80	7,93	14,28
20	300 to 600	R 73	584,20	12,70	19,05
20	900	R 74	584,20	19,05	25,40
20	1.500	R 75	584,20	31,75	39,68
24	150	R 76	673,10	7,93	14,28
24	300 to 600	R 77	692,15	15,87	22,22
24	900	R 78	692,15	25,40	33,33
24	1.500	R 79	692,15	34,92	44,45
22	150	R 80	615,95	7,93	—
22	300 to 600	R 81	635,00	14,28	—
1	10.000	R 82	57,15	11,11	—
1 1/2	10.000	R 84	63,50	11,11	—
2	10.000	R 85	79,37	12,70	—
2 1/2	10.000	R 86	90,49	15,87	—
3	10.000	R 87	100,01	15,87	—
4	10.000	R 88	123,83	19,05	—
3 1/2	10.000	R 89	114,30	19,05	—
5	10.000	R 90	155,58	22,22	—
10	10.000	R 91	260,35	31,75	—
—	—	R 92	228,60	11,11	17,46
26	300, 400, 600	R 93	749,30	19,05	—
28	300, 400, 600	R 94	800,10	19,05	—
30	300, 400, 600	R 95	857,25	19,05	—
32	300, 400, 600	R 96	914,40	22,22	—
34	300, 400, 600	R 97	965,20	22,22	—
36	300, 400, 600	R 98	1.022,35	22,22	—
8	2.000, 3.000	R 99	234,95	11,11	—
26	900	R 100	749,30	28,58	—
28	900	R 101	800,10	31,75	—
30	900	R 102	857,25	31,75	—
32	900	R 103	914,40	31,75	—
34	900	R 104	965,20	34,93	—
36	900	R 105	1.022,35	34,93	—